

MONUMENT RECORD

Corner ID: **Per_E07**

1/4 Corner


Sections 07 & 08- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana

Section 07	Section 08
T08N-R01W	T08N-R01W
Perry	Perry

MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
8" x 8" limestone with drill hole in center found 0.5' above grade.

MONUMENT LOCATION SKETCH:

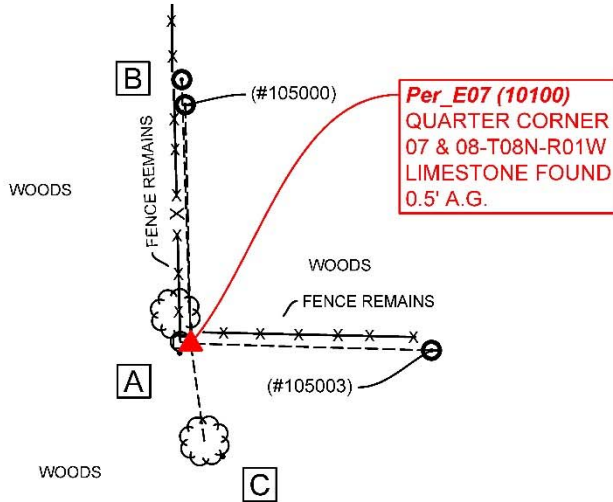

WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 79d W	2.2'	PK Nail found 2.2' above grade on south side of 7" fence corner post with a 9.8" maple tree growing around it and the fence per 1996 tie sheet.
Witness B	N 2d W	54.9'	Top center of "Park Boundary" sign.
Witness C	S 8d E	20.4'	Mag Nail with Washer set in lightly scarred spot on southeast side of 8.5" Maple Tree 0.9' above grade.
(#105000)	N 1d W	49.6'	Witness Stone 6"x6" with drill hole in center found 9" above grade, firmly in place per 1996 tie sheet.
(#105003)	S 88d E	50.1'	Witness Stone 6"x6" with drill hole in center found 8" above grade, firmly in place per 1996 tie sheet.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Per_E07**

1/4 Corner

Sections 07 & 08- T08N-R01W, 2nd P.M.
Perry Township, Monroe County, Indiana

PHOTO IDENTIFIED: Photo Date: 11/12/2021



Photo Orientation & Description: Per_E07 from above



Photo Orientation & Description: Per_E07 from southwest



Photo Orientation & Description: Per_E07 from west



Photo Orientation & Description: Per_E07 from south

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 11/12/2021 By: JMG Monument Found: Limestone BTs or Reference bjects Found: Found a "Protect Nearby Survey Marker" sign 1.18' southeast from monument. A witness stone was found to the north (#105000). A witness stone was found to the east (#105003). A PK nail was found 2.2' above grade on the south side of a 7" fence post with a 9.8" maple tree twisted around it and the fence (Witness A). Also found from the 1996 Monument Record was the twin ash, dead and rotten on the west side yet still standing. The 12" maple was also found but dead and fallen. Project #: Per_C07 Field Book: 54/37 Equipment: The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover. Coordinates are available upon request. Distances to witness ties were collected with a Leica Disto laser distance meter. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provided distances over bearings. Notes: All witness photos on file in the Monroe County Surveyors Office.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 2 of 3

MONUMENT RECORD

Corner ID: **Per_E07**

1/4 Corner

Sections 07 & 08- T08N-R01W, 2nd P.M.
Perry Township, Monroe County, Indiana

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

From Tapp Road, moving north on Adams Street, Adams Street dead ends into a wooded area. If one proceeds through the woods northeasterly along the angle of Adam's Street's continuance, the monument can be found. The witness stone on the east side of the monument is easy to spot and the fence it is close to runs westerly and directly to Per_E07. Summit Elementary School is directly southeast of the monument.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

Geodetic coordinates were captured for Per_E07 along with the north and east witness stones known herein as (#105000) and (#105003) respectively. The durability of "Protect Nearby Survey Marker" sign was assured. One new witness was set. And the monument stone was painted.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The stone was previously witnessed by the Monroe County Surveyor, Michael W. Friley, on January 31, 1996. It is believed that this stone (and the two witness stones) were set by Indiana Limestone per a 1929 survey by Farewell on file at the Surveyor's Office as RSID004674. Other References on File: Ben Bledsoe retracement survey for Harvey Sudbury (2014) on file in Recorder's Office (2014004467.IN) and Gary Kent survey, Bloomington Industrial Complex (2004), on file in the Recorder's Office (2004020621.IN). Historic research has not yet been performed to prove the validity of this monument.

CERTIFICATION:



Date: 02/22/2022 Date:
Trohn Enright-Randolph
Monroe County Surveyor



02/22/2022
Accepted by the Monroe
County Survey Review Board



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 3 of 3

MONUMENT RECORD


Corner I.D. #

E-7

STATE OF INDIANA - COUNTY OF MONROE

Section Eight (8), Township 8 North, Range 1 West

Monument Description & Remarks: Found Limestone stone w/drill hole at West 1/4 corner. Stone is firmly in place, 8" x 8" x 6" out of ground, green around hole evidence of brass or copper disc. Survey marker sign & post set.

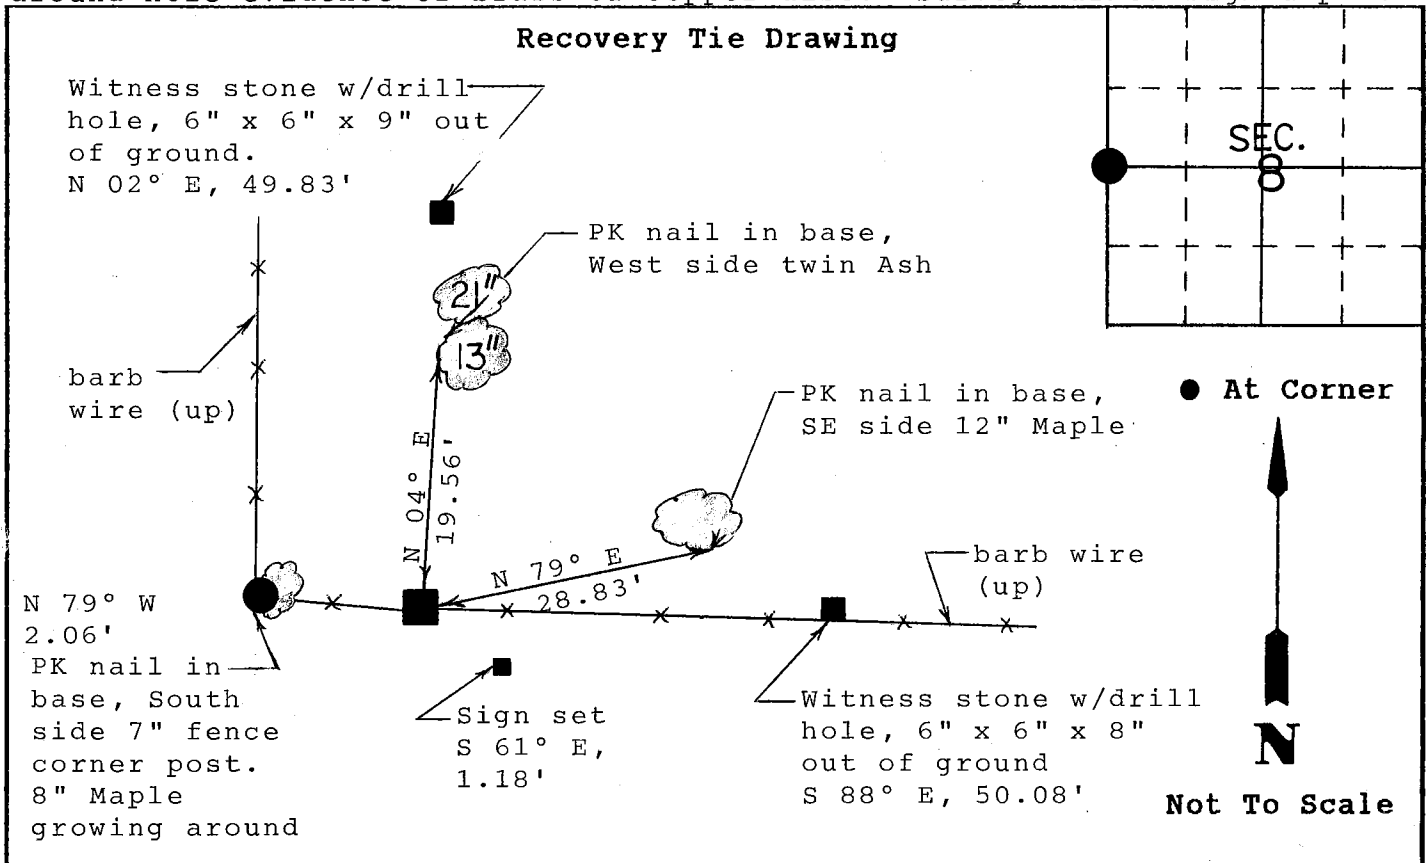

State of Indiana

County of Monroe

Space
Reserved For
Recording
Officer

I, Michael W. Friley, County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 17-3-64-4 through 17-3-64-8 of the Indiana Code, being Acts of 1965, Chapter 319; and the above data is given under my hand and seal this 31st day of January, 1996 A.D.

Indiana Registered Land Surveyor No. _____ or

Monroe County Surveyor's Office
United States Government Agency

Monroe County Surveyor
Title _____

Field Book:

96-01

Page:

8